

Head Office

685 Sheikh Zayed Rd., Dubai, UAE
Monday to Saturday:9AM-8PM
+971506556977
admin@homeitems.ae

Hong Kong Branch

Room A1,11/FWinner Building,36Man Yue street, Hung Hom,
Kowloon, HongKong
admin@homeitems.ae

HOME ITEMS FF&E LED LIGHT



HOME ITEMS
BUILDING MATERIALS TRADING LLC



LED Wall Washer 01G



Product Features

- ★ CREE XP-E High Power LED
- ★ LedLink Lens
- ★ Anodized and painted 6063 aluminum housing, silk printed tempered glass T=3mm
- ★ 90° rotatable aluminum mounting bracket, easier for installation and use
- ★ IP67 waterproof, with IP67 Male&Female aluminum waterproof connector
- ★ Length options: 0.3m, 0.5m, 0.6m, 1.0m, 1.2m
- ★ RGB type wall washer compatible with international standard DMX control system

Product Model



NCW-30101

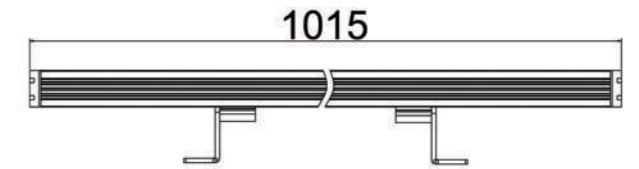

Product Series



NCW-9101



NCW-15101



NCW-18101

Application



Model	LED Type	Voltage	Power	Color	Size
NCW-9101	9PCS CREE XP-E	DC24V	9W	Single Color/RGB	315*36*25.5mm
NCW-15101	15PCS CREE XP-E	DC24V	15W	Single Color/RGB	515*36*25.5mm
NCW-18101	18PCS CREE XP-E	DC24V	18W	Single Color/RGB	615*36*25.5mm
NCW-30101	30PCS CREE XP-E	DC24V	30W	Single Color/RGB	1015*36*25.5mm
NCW-36101	36PCS CREE XP-E	DC24V	36W	Single Color/RGB	1215*36*25.5mm




LED Wall Washer 02G

Product Features

- ★ CREE XP-E high power LED
- ★ LedLink Lens
- ★ Anodized and painted 6063 aluminum housing, silk printed tempered glass T=3mm
- ★ 90° rotatable aluminum mounting bracket, easier for installation and use
- ★ IP67 waterproof, with IP67 male&female aluminum waterproof connector
- ★ Length options: 0.3m, 0.5m, 0.6m, 1.0m, 1.2m
- ★ RGB type wall washer compatible with international standard DMX control system

Product Model

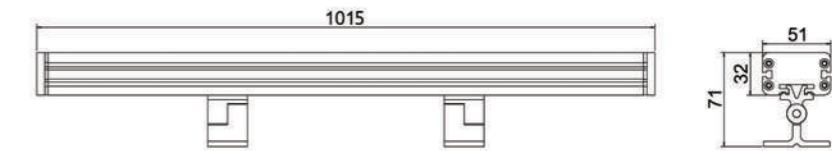

NCW-30102

Product Series



NCW-18102



NCW-30102



NCW-36102

Application



Specifications

Model	LED Type	Voltage	Power	Color	Size
NCW-9102	9PCS CREE XP-E	DC24V	9W	Single Color/RGB	315*51*32mm
NCW-15102	15PCS CREE XP-E	DC24V	15W	Single Color/RGB	515*51*32mm
NCW-18102	18PCS CREE XP-E	DC24V	18W	Single Color/RGB	615*51*32mm
NCW-30102	30PCS CREE XP-E	DC24V	30W	Single Color/RGB	1015*51*32mm
NCW-36102	36PCS CREE XP-E	DC24V	36W	Single Color/RGB	1210*51*32mm




LED Wall Washer 03G

Product Features

- ★ CREE high power LED
- ★ LedLink Lens
- ★ Anodized and painted 6063 aluminum housing, silk printed tempered glass
- ★ 90°rotatable aluminum mounting bracket, easier for installation and use
- ★ Ip67 waterproof, with IP67 male&female aluminum waterproof connector
- ★ Standard length 1000mm, other length can be customized
- ★ RGB type wall washer compatible with international standard DMX control system

Product Model

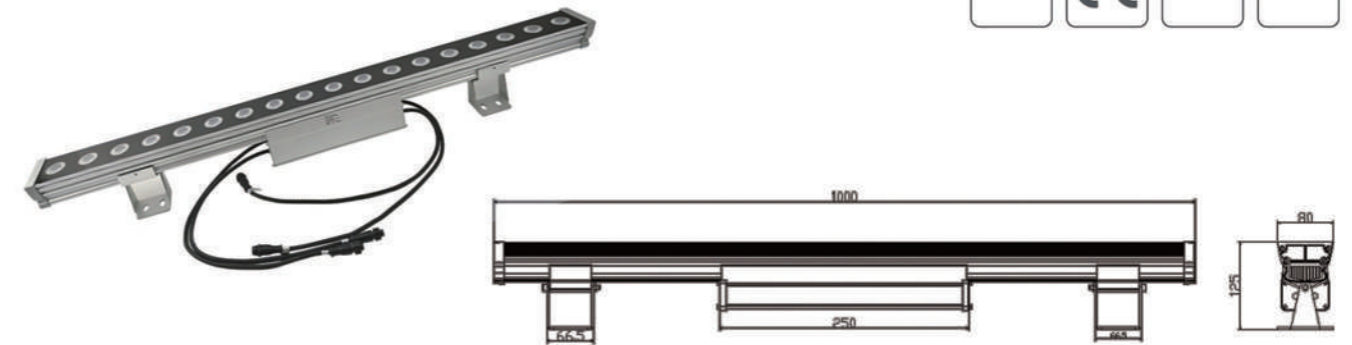

NCW-24403

Product Series



NCW-24403



NCW-36303D

Application



Specifications

Model	LED Type	Voltage	Power	Color	Size
NCW-18403	18PCSCREE	DC24V/ AC100-240V	72W	Single color/RGB/RGBW 4in1	1000*80*60mm
NCW-24403	24PCS CREE	DC24V/ AC100-240V	90W	Single color/RGB/RGBW 4in1	1000*80*60mm
NCW-36303D	36PCS CREE	DC24V/ AC100-240V	90W	Single color/RGB	1000*80*60mm



LED Underwater Flood Light



Product Features

- ★ Concise & smart appearance design
- ★ Powerful Edison/CREE LED as light source
- ★ 316# stainless steel housing lamp body, better corrosion resisting & anti-oxidation
- ★ Optical lens, light transmission ≥90%
- ★ With adjustable stainless steel bracket
- ★ Single color/RGB/RGB 3in1 available
- ★ IP68, CE & RoHS certificates

Product Model



NCU-123A

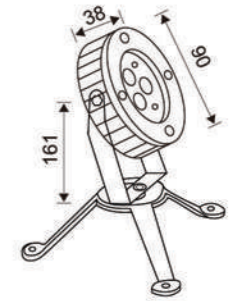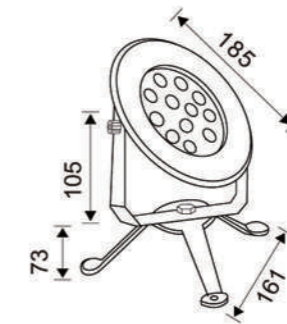

Product Series



NCU-13A



NCU-33A



NCU-63A



NCU-93A

Application



Specifications

Model	LED Type	Voltage	Color	Dimension	IP Rank	Beam angle	Material
NCU-13A	1*1W/ 1*3W	DC24V	Single color/RGB3in1	67.5(DIA)*83(H)mm	IP68	30°	316 stainless steel
NCU-33A	3*1W/ 3*3W	DC24V	Single color/RGB/RGB 3in1	90(DIA)*38(H)mm	IP68	30°	316 stainless steel
NCU-63A	6*1W/ 6*3W	DC24V	Single color/RGB3in1	150(DIA)*89(H)mm	IP68	30°	316 stainless steel
NCU-93A	9*1W/ 9*3W	DC24V	Single color/RGB/RGB3in1	150(DIA)*89(H)mm	IP68	30°	316 stainless steel
NCU-123A	12*1W/ 12*3W	DC24V	Single color/RGB/RGB3in1	185(DIA)*65(H)mm	IP68	30°	316 stainless steel



Recessed LED Pool Light


Product Features

- ★ Concise & smart appearance design
- ★ Powerful Edison/CREE LED as light source
- ★ 316# stainless steel housing lamp body, better corrosion resisting & anti-oxidation.
- ★ Optical lens, light transmission ≥90%
- ★ With ABS embedded box, for easier installation
- ★ Single color/RGB/RGB 3in1 available
- ★ IP68, CE & RoHS certificates

Product Model



NCU-33B

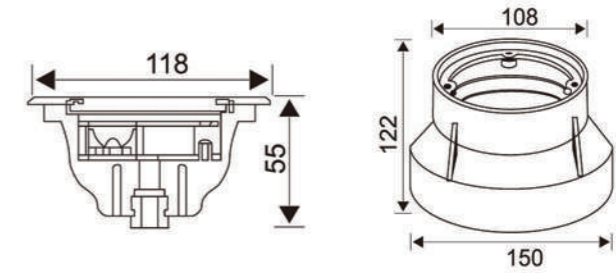

Product Series



NCU-13B



NCU-63B



NCU-123B

Application



Specifications

Model	LED Type	Voltage	Color	Dimension	IP Rank	Beam angle	Material
NCU-13B	1*1W/ 1*3W	DC24V	Single color/ RGB3in1	67.5(DIA)*85(H)mm	IP68	30°	316 stainless steel
NCU-33B	3*1W/ 3*3W	DC24V	Single color/ RGB/RGB3in1	118(DIA)*55(H)mm	IP68	30°	316 stainless steel
NCU-63B	6*1W/ 6*3W	DC24V	Single color/ RGB3in1	162(DIA)*65(H)mm	IP68	30°	316 stainless steel
NCU-93B	9*1W/ 9*3W	DC24V	Single color/ RGB/RGB3in1	162(DIA)*65(H)mm	IP68	25°	316 stainless steel
NCU-123B	12*1W/ 12*3W	DC24V	Single color/ RGB/RGB3in1	185(DIA)*65(H)mm	IP68	25°	316 stainless steel
NCU-63L	6*1W/ 6*3W	DC24V	Single color/ RGB3in1	330(L)*62(W)mm	IP68	30°	316 stainless steel



LED Fountain Light



Product Features

- ★ Concise & smart appearance design
- ★ Powerful Edison/CREE LED as light source
- ★ 316# stainless steel housing lamp body, better corrosion resisting & anti-oxidation.
- ★ Optical lens, light transmission ≥90%
- ★ Single color/RGB/RGB 3in1 available
- ★ IP68, CE & RoHS certificates

Product Model



NCU-93C

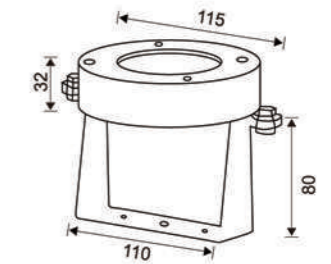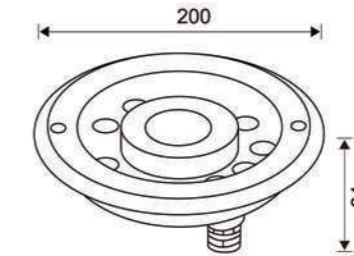

Product Series



NCU-63C



NCU-93D




NCU-123C

Application



Specifications

Model	LED Type	Voltage	Color	Dimension	IPRank	Beam angle	Material
NCU-63C	6*1W/6*3W	DC24V	Single color/RGB/RGB 3in1	115(DIA)*32(H)mm	IP68	30°	316 stainless steel
NCU-93C	9*1W/9*3W	DC24V	Single color/RGB/RGB 3in1	200(DIA)*64(H)mm	IP68	30°	316 stainless steel
NCU-93D	9*1W/9*3W	DC24V	Single color/RGB/RGB 3in1	160(DIA)*36(H)mm	IP68	30°	316 stainless steel
NCU-123C	12*1W/12*3W	DC24V	Single color/RGB/RGB 3in1	200(DIA)*64(H)mm	IP68	30°	316 stainless steel
NCU-123F	12*1W/12*3W	DC24V	Single color/RGB/RGB 3in1	180 (DIA)*85(H)mm	IP68	30°	304stainless steel

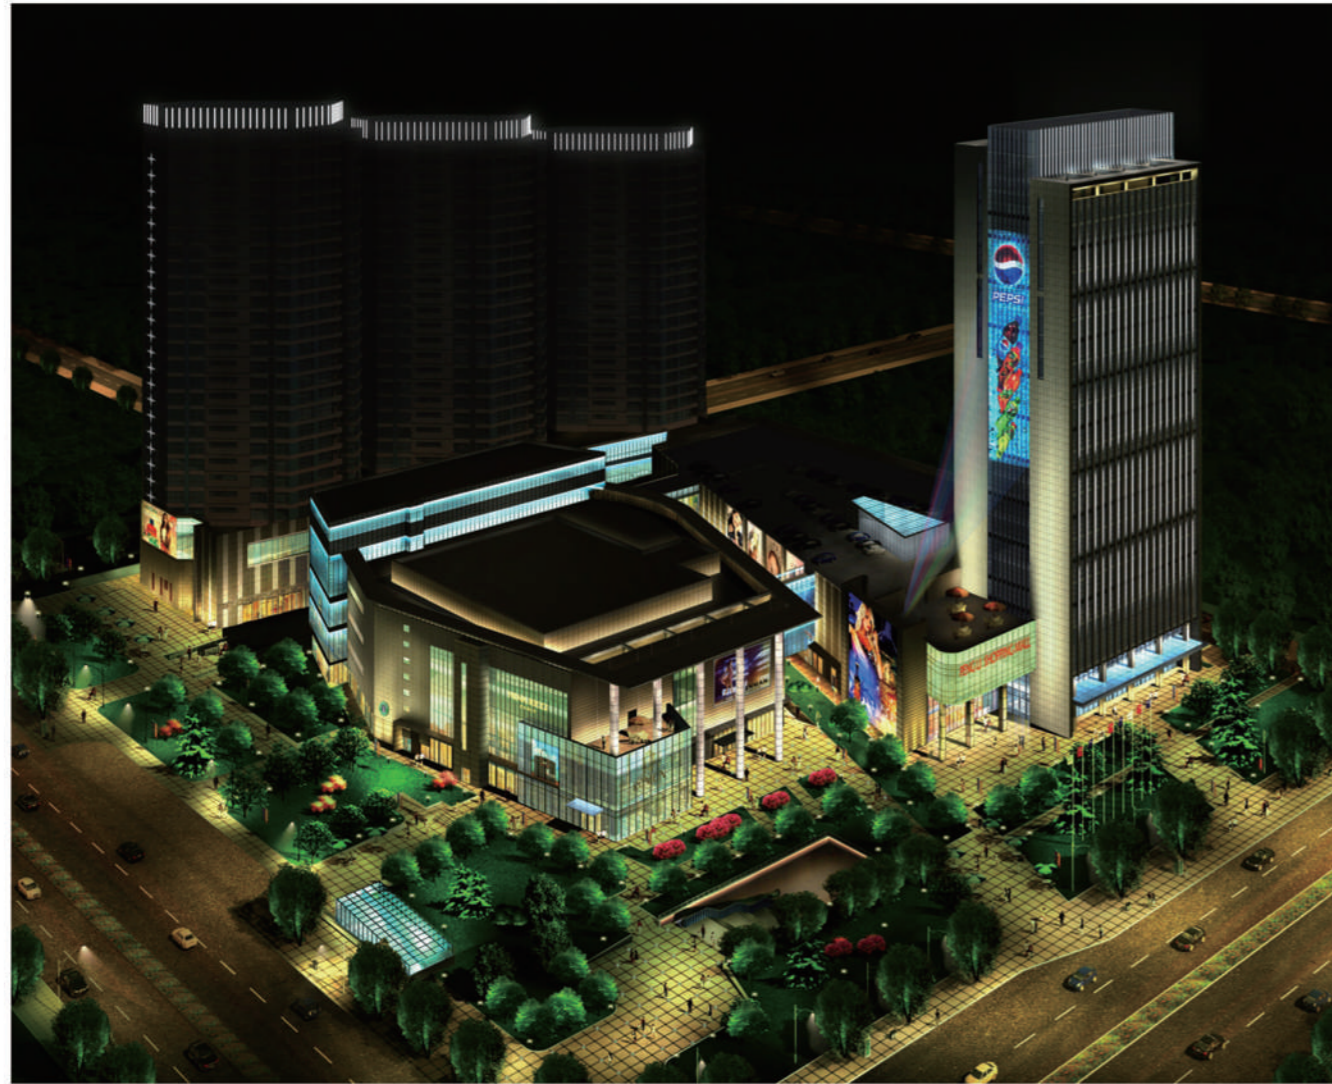

LED Garden Light


Product Features

- ★ High power CREE/Edison LED as light source
- ★ AC100-240V/DC24V input voltage available
- ★ Single color/RGB different color available.
- ★ Anodized 6063 Aluminum housing, elegant design and good for heat sinking
- ★ With spike or base for easier installation and use
- ★ CE, RoHS & IP67 certificates

Product Model



NCGS-63C

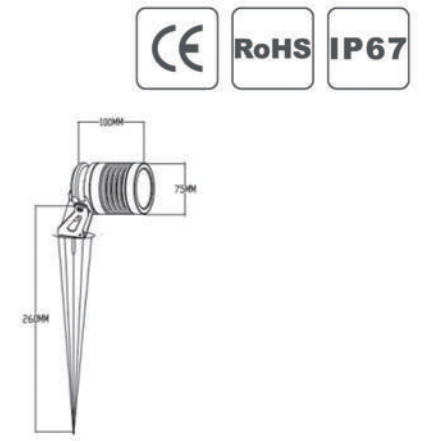

Product Series



NCGS-13



NCGS-15



NCGS-33C



NCGS-63C

Specifications

Model	LED Type	Voltage	Color	Dimension	Beam angle	IP Rank	Material
NCGS-13	1*3W/ 1*1W	DC24V/ AC110-240V	single color/RGB3in1	42(DIA)*75(H)*160mm (spike)/85mm(base)	15°/30°	IP67	Anodized aluminum
NCGS-15	1*5W	DC24V/AC110-240V	single color	48(DIA)*82.5(H)*290mm (spike)/78mm(base)	30° /60°	IP67	Anodized aluminum
NCGS-17	1*7W	DC24V/AC110-240V	single color	48(DIA)*82.5(H)*290mm (spike)/78mm(base)	30° /60°	IP67	Anodized aluminum
NCGS-33C	3*3W	DC24V/AC110-240V	single color/ RGB/RGB 3in1	75(DIA)*100(H)*220mm (spike)/88mm(base)	15° /30° /45° /60°	IP67	Anodized aluminum
NCGS-63C	6*3W	DC24V/AC110-240V	single color /RGB/RGB 3in1	75(DIA)*100(H)*220mm (spike)/88mm(base)	15° /30° /45° /60°	IP67	Anodized aluminum
NCGS-31B	3*1W	DC24V/ AC110-240V	single color/RGB	97(DIA)*89(H)*258mm (spike)/108mm(base)	15°/30°/45°	IP67	stainless steel cover,Aluminum die-casting
NCGS-33B	3*3W	DC24V/ AC110-240V	single color/ RGB/RGB3in1	97(DIA)*89(H)*258mm (spike)/108mm(base)	15°/30°/45°	IP67	stainless steel cover,Aluminum die-casting
NCGS-51	5*1W	DC24V/ AC110-240V	single color	108(DIA)*150(H)*380mm (spike)/105mm(base)	15°/30°/45°	IP67	Aluminum die-casting
NCGS-53	5*3W	DC24V/ AC110-240V	single color/RGB3in1	108(DIA)*150(H)*380mm (spike)/105mm(base)	15°/30°/45°	IP67	Aluminum die-casting
NCGS-33G	3*3W	DC24V/ AC110-240V	single color/ RGB/RGB 3in1	126.5(DIA)*85*160mm	30°/45°/60°	IP67	Aluminum die-casting



LED Inground Light


Product Features

- ★ High power CREE/Edison LED as light source
- ★ DC24V/AC100-240V input voltage available
- ★ Stainless steel cover, anodized 6063 aluminum housing
- ★ Single color/RGB different color for selection
- ★ With ABS embedded box for easier installation
- ★ IP67 waterproof for outdoor use
- ★ CE, RoHS, IP67 & SAA certificates

Product Model



NCI-63E

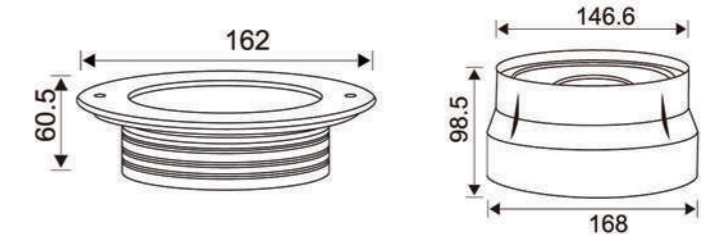

Product Series



NCI-13A



NCI-15C



NCI-33F



NCI-123G

Application



Specifications

Model	LED Type	Voltage	Color	Dimension	Beam angle	IP Rank	Material
NCI-13A	1*3W/1*1W	DC24V/AC110-240V	single color/RGB 3in1	50(DIA)*71(H)mm	30°	IP67	304#stainless steel, Aluminum
NCI-13B	1*3W/1*1W	DC24V/AC110-240V	single color/RGB 3in1	55(DIA)*72(H)mm	30°	IP67	304#stainless steel, Aluminum
NCI-13BS	1*3W/1*1W	DC24V/AC110-240V	single color	55(DIA)*72(H)mm	30°	IP67	304#stainless steel, Aluminum
NCI-15C	1*5W	AC110-240V	single color	70(DIA)*80(H)mm	30°	IP67	304#stainless steel, Aluminum
NCI-13C	1*3W/1*1W	DC24V/AC110-240V	single color/RGB 3in1	67.5(DIA)*72.5(H)mm	30°	IP67	304#stainless steel, Aluminum
NCI-33F	3*1W/3*3W	DC24V/AC110-240V	single color/RGB/RGB 3in1	118(DIA)*68(H)mm	30°	IP67	304#stainless steel, Aluminum
NCI-63E	6*1W/6*3W	DC24V/AC110-240V	single color/RGB 3in1	160(DIA)*50(H)mm	30°	IP67	304#stainless steel, Aluminum
NCI-93H	9*1W/9*3W	DC24V/AC110-240V	single color/RGB 3in1	160(DIA)*37(H)mm	30°	IP67	304#stainless steel, Aluminum
NCI-123G	12*1W/12*3W	DC24V/AC110-240V	single color/RGB/RGB 3in1	185(DIA)*50(H)mm	30°	IP67	304#stainless steel, Aluminum
NCI-361I	36*1W	DC24V/AC110-240V	single color/RGB	185(DIA)*50(H)mm	45°	IP67	304#stainless steel, Aluminum
NCI-63L	6*3W	DC24V/AC110-240V	single color/RGB/RGB 3in1	210(L)*95(W)mm	30°	IP67	304#stainless steel, Aluminum




LED Mini Inground Light

Product Features

- ★ High power CREE/Edison LED as light source
- ★ IP67 waterproof for outdoor use
- ★ Single color/RGB different color for selection
- ★ High quality 304 stainless steel surface cover, and anti-static spraying treatment.
- ★ High brightness, low energy consumption, soft lighting, no glare.
- ★ Clear transparent tempered glass, heat-resisting and impact resistance.

Product Model

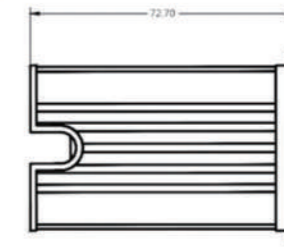

Product Series



NCI-1142

NCI-1152

NCI-1162

Application



Specification

Model	LEDType	Voltage	Color	Dimension	Beam angle	IP rank	Material
NCI-1142	1*1W/1*3W	DC24V/DC12V	Single color/RGB 3in1	42x50mm	30°	IP65/IP68	Total Stainless Steel 304
NCI-1152	1*1W/1*3W	DC24V/DC12V	Single color/RGB 3in1	52x58mm	30°	IP65/IP68	Total Stainless Steel 304
NCI-1162	1*1W/1*3W	DC24V/DC12V	Single color/RGB 3in1	62x59mm	30°	IP65/IP68	Total Stainless Steel 304




High Power LED Inground Light D Series

产品特点 Product Features

- ★ High Power CREE LED as light source
- ★ DC24V, 12W/18W/24W/36W/54W
- ★ Stainless steel cover, die-cast aluminum housing
- ★ Single color/RGB different color for selection
- ★ With plastic embedded box for easier installation
- ★ IP67 waterproof for outdoor use
- ★ CE, RoHS & IP67 certificates

Product Model



NCI-63D

Product Series



NCI-63D




NCI-93D



NCI-243D

Application

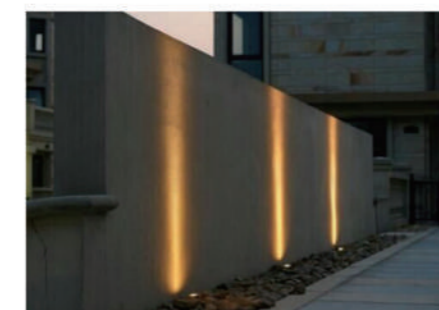

Specification

Model	Power	Input Voltage	Color	Dimension	Beam Angle	IP Rank	Material
NCI-63D	12W	DC24V/AC100-240V	单色/RGB 3in1	160(DIA)*120(H)mm	30°	IP67	304#stainless steel, Aluminum
NCI-93D	18W	DC24V/AC100-240	单色/RGB 3in1	180(DIA)*120(H)m	30°	IP67	304#stainless steel, Aluminum
NCI-123D	24W	DC24V/AC100-240	单色/RGB 3in1	210(DIA)*120(H)mm	30°	IP67	304#stainless steel, Aluminum
NCI-243D	36W	DC24V/AC100-240	单色/RGB 3in1	280(DIA)*135(H)mm	30°	IP67	304#stainless steel, Aluminum
NCI-363D	54W	DC24V/AC100-240	单色/RGB 3in1	320(DIA)*110(H)mm	30°	IP67	304#stainless steel, Aluminum



Ultra-slim LED Flood Light


Product Features

- ★ High brightness OSRAM/ PHILIPS as light source
- ★ High lumen 120-130lm/w high CRI > 80Ra
- ★ IP65 Waterproof for outdoor use
- ★ Brand LED driver, lifespan > 50000hrs
- ★ Ultra-slim PCCOOLER Housing, tempered glass cover (T=4mm)

Product Model



NCF-S1002

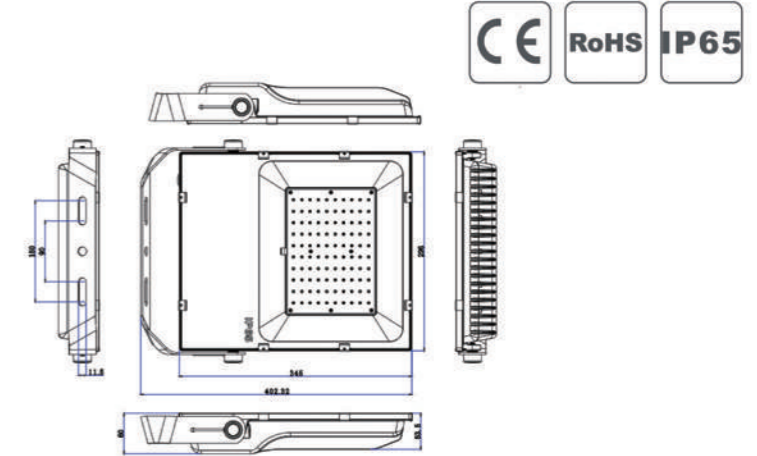

Product Series



NCF-S102



NCF-S502



NCF-S2002

Application



Specifications

Model	LED Type	Voltage	Power	Color	Size
NCF-S102	10PCS SMD3030	AC100-240V	10	3000K/4000K/6000K	140x107x32mm
NCF-S202	20PCS SMD3030	AC100-240V	20	3000K/4000K/6000K	190x152x40mm
NCF-S302	30PCS SMD3030	AC100-240V	30	3000K/4000K/6000K	200x167x40mm
NCF-S502	50PCS SMD3030	AC100-240V	50	3000K/4000K/6000K	265x220x50mm
NCF-S802	80PCS SMD3030	AC100-240V	80	3000K/4000K/6000K	300x245x55mm
NCF-S1002	100PCS SMD3030	AC100-240V	100	3000K/4000K/6000K	345x295x60mm
NCF-S1502	150PCS SMD3030	AC100-240V	150	3000K/4000K/6000K	365x330x60mm
NCF-S2002	200PCS SMD3030	AC100-240V	200	3000K/4000K/6000K	400x360x60mm



IP65 Waterproof LED Downlight

Product Features

- ★ Epistar SMD2835 LED from Taiwan
- ★ AC100-240V, 7W/9W/12W/15W/20W
- ★ High lumen 100lm/W, high CRI>85Ra
- ★ High quality drivers, PF>0.9
- ★ Long lifespan over 50000Hrs
- ★ ADC12 Aluminum alloy housing, PC cover
- ★ IP65 waterproof

Product Model

NCDL-12W

CE RoHS IP65

Technical drawings showing dimensions: Ø110, Ø75, Ø90, Ø60, 110, 110, Ø98, Ø81, 50, 46.

Product Series

NCDL-7W **NCDL-9W** **NCDL-12W** **NCDL-20W**

Application

Specifications

Model	LED Type	Voltage	Power	Color	Size	Cover Shape
NCDL-7W	16PCS SMD2835	AC100-240V	7W	3000K/4000K/6000K	90(DIA)*45mm	Round/Square
NCDL-9W	20PCS SMD2835	AC100-240V	9W	3000K/4000K/6000K	90(DIA)*45mm	Round/Square
NCDL-12W	26PCS SMD2835	AC100-240V	12W	3000K/4000K/6000K	108(DIA)*50mm	Round/Square
NCDL-15W	30PCS SMD2835	AC100-240V	15W	3000K/4000K/6000K	108(DIA)*50mm	Round/Square
NCDL-20W	42PCS SMD2835	AC100-240V	20W	3000K/4000K/6000K	190(DIA)*45mm	Round



Double Heads Outdoor LED Wall Light

Product Features

- ★ High brightness Samsung SMD5630 LED
- ★ Concise & smart appearance design
- ★ High quality aluminum housing
- ★ IP65 waterproof, for outdoor use


Product Model



NCWL-23B



Product Series



NCWL-23B




NCWL-23W




NCWL-23W

Application

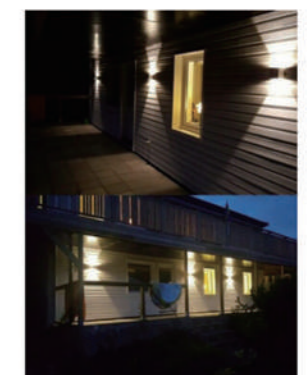

Specification


Model	LEDType	Voltage	Color	Dimension	Housing Color	IP rank	Material
NCWL-23W	12pcs SMD5630	DC24V	2700K/3000K /4000K/6000K	100L*85W *35Hmm	White	IP65	Aluminum
NCWL-23B	12pcs SMD5630	DC24V	2700K/3000K /4000K/6000K	100L*85W *35Hmm	Black	IP65	Aluminum

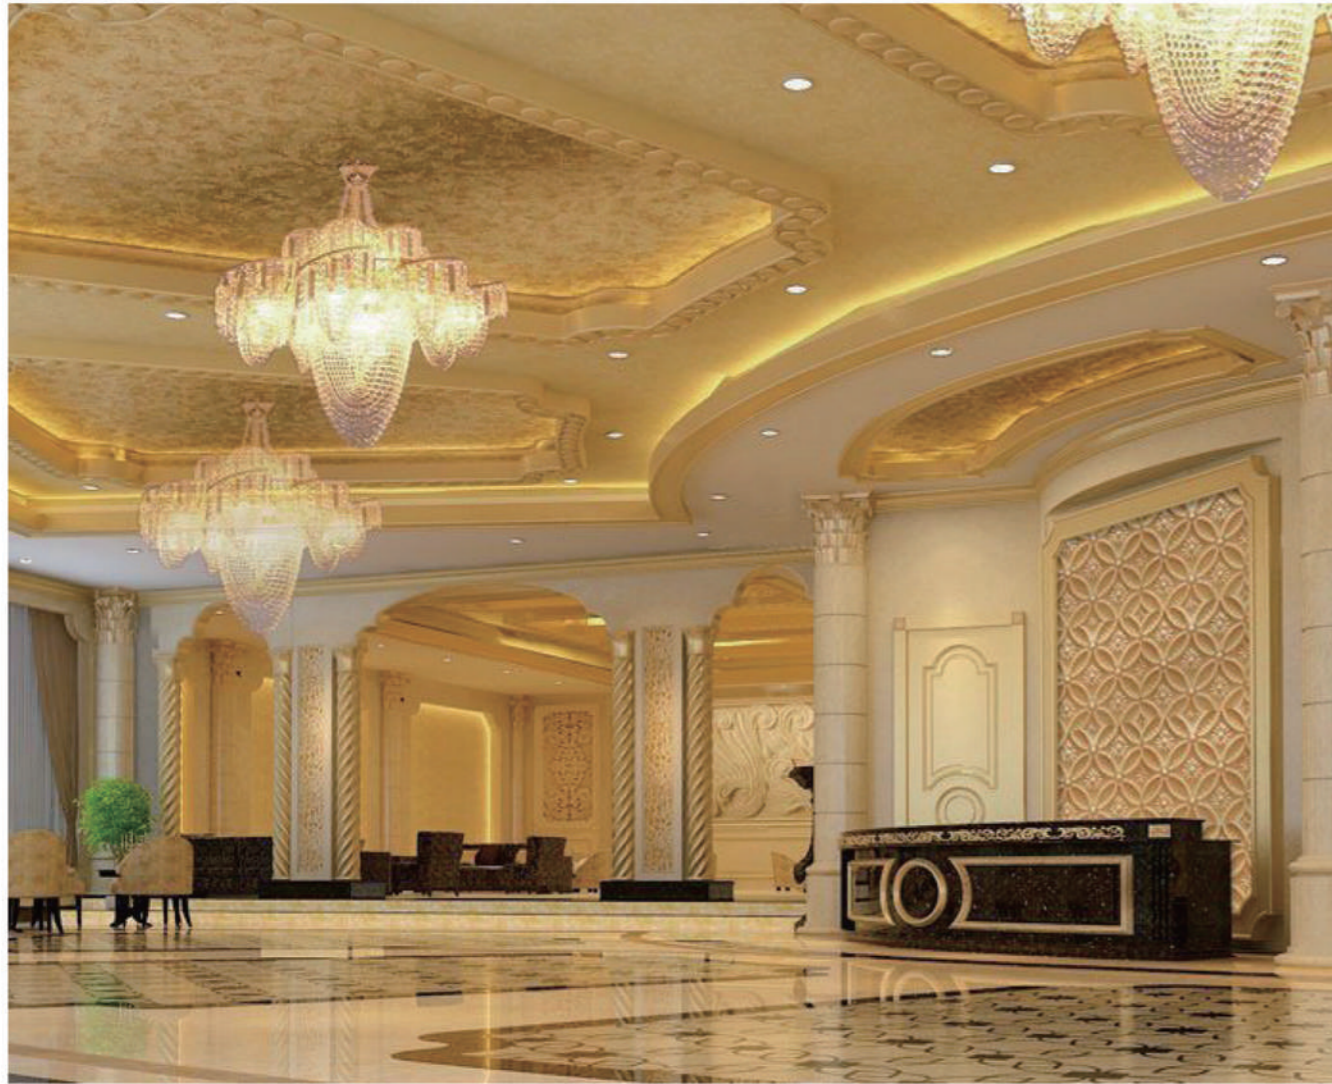


Product Model



NCR-5330

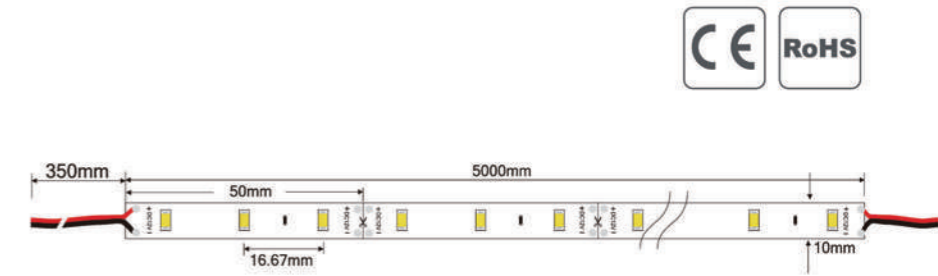

Application

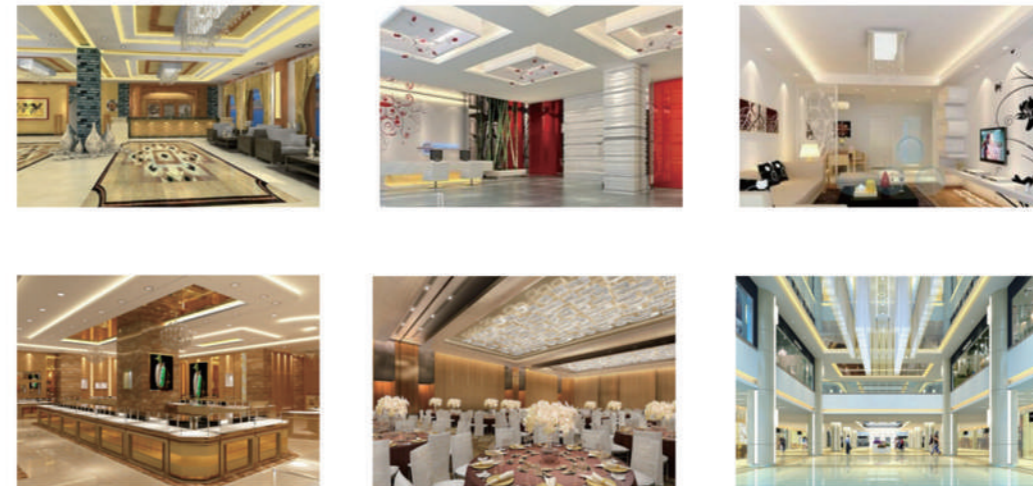

Samsung SMD5630/2835 LED Strip

Product Features

- ★ Original Samsung SMD5630/2835 LED from South Korea
- ★ High lumen 35-50lm/LED, high CRI>82Ra
- ★ 0.3mm thick double layer PCB board, high flexibility
- ★ CE, RoHS certificates

Specifications

Model	LED Type	Input Voltage	Power	Color	CRI	Lumen	Size	IP Rate
NCR-5315	30LEDs/m Samsung SMD5630	DC12V	12W/m	2700K/3000K/4000K/6000K	>82Ra	35-50lm/LED	5000*10*2.2mm	IP20/IP65
NCR-5330	60LEDs/m Samsung SMD5630	DC12V/DC24V	15W/m 21W/m	2700K/3000K/4000K/6000K	>82Ra	35-50lm/LED	5000*10*2.2mm	IP20/IP65
NCR-2330	60LEDs/m Samsung SMD2835	DC24V	15W/m 21W/m	2700K/3000K/4000K/6000K	>82Ra	35-50lm/LED	5000*8*2.2mm	IP20/IP65
NCR-2360	120LEDs/m Samsung SMD2835	DC24V	28.8W/m	2700K/3000K/4000K/6000K	>82Ra	35-50lm/LED	5000*10*2.2mm	IP20/IP65




Epistar SMD LED Strip

Product Features

- ★ Epistar SMD5050/3528/2835 LED from Taiwan
- ★ High lumen SMD5050 24-26lm/LED, SMD3528 6-8lm/LED
- ★ Single color/RGB/RGBW different color types for selection
- ★ Double layer PCB board, high flexibility
- ★ CE, RoHS certificates

Product Model

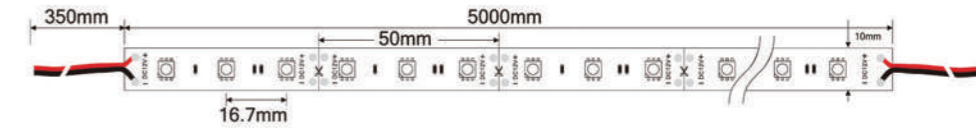

NCR-530

Product Series



NCR-530



NCR-560

Specifications


Model	LED Type	Input Voltage	Power	Color	CRI	Lumen	Size	IP Rate
NCR-330	60LEDs/m Epistar SMD3528	DC12V/ DC24V	4.8W/m	Single color	6-8lm/LED	>75Ra	5000*8*2.2mm	IP20/IP65 /IP68
NCR-360	120LEDs/m Epistar SMD3528	DC12V/ DC24V	9.6W/m	Single color	6-8lm/LED	>75Ra	5000*8*2.2mm	IP20/IP65 /IP68
NCR-530	60LEDs/m Epistar SMD5050	DC12V/ DC24V	14.4W/m	Single color /RGB	24-26lm/LED	>75Ra	5000*10*2.2mm	IP20/IP65 /IP68
NCR-5304	60LEDs/m Epistar SMD5050	DC12V/ DC24V	14.4W/m	RGBW 4in1	24-26lm/LED	>75Ra	5000*10*2.2mm	IP20/IP65 /IP68
NCR-560	120LEDs/m Epistar SMD5050	DC24V	28.8W/m	2700K/3000K/ 4000K/6000K	24-26lm/LED	>75Ra	5000*12*2.2mm	IP20/IP65
NCR-560DL	120LEDs/m Epistar SMD5050	DC24V	28.8W/m	Single color/ RGB	24-26lm/LED	>75Ra	5000*14*2.2mm	IP20/IP65
NCR-2330	60LEDs/m Epistar SMD2835	DC12V	14.4W/m	Single color	24-26lm/LED	>75Ra	5000*8*2.2mm	IP20/IP65/ IP68
NCR-2360	120LEDs/m Epistar SMD2835	DC12V/ DC24V	28.8W/m	Single color	24-26lm/LED	>75Ra	5000*10*2.2mm	IP20/IP65



Product Model



Application

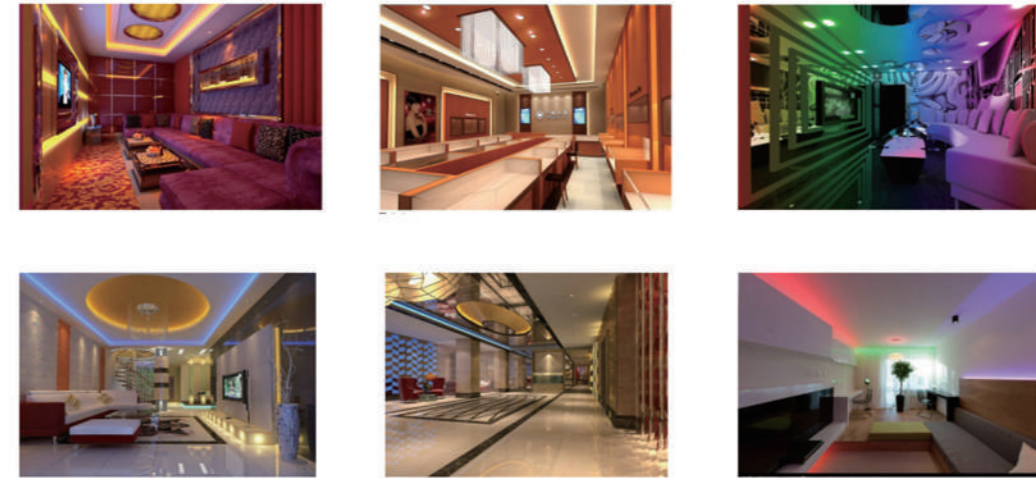

Pixel LED Strip

Product Features

- ★ High brightness SMD5050 LED
- ★ Each 1 or 3 LED individually controlled
- ★ Can show customized effects
- ★ Variety color changing effects
- ★ IC built-in LED
- ★ Long lifetime for 50,000hrs
- ★ CE, RoHS certificates

Specifications

Model	LED Type	Input Voltage	Power	Color	IC Qty	IC type
NCR-515P5	30LEDs/m SMD5050	DC5V	9W/m	RGB	30	APA104 SK6812 WS2812B
NCR-530P5	60LEDs/m SMD5050	DC5V	18W/m	RGB	60	APA104 SK6812 WS2812B WS2811 UCS1903
NCR-5154P	30LEDs/m SMD5050	DC5V	12W/m	RGBW	30	APA104 SK6812 WS2812B
NCR-5304P	60LEDs/m SMD5050	DC5V	24W/m	RGBW	60	APA104 SK6812 WS2812B
NCR-57204P	144LEDs/m SMD5050	DC5V	43.2W/m	RGBW	144	APA104 SK6812 WS2812B
NCR-530P	60LEDs/m SMD5050	DC12V	14.4W/m	RGB	20	WS2811 UCS1903

LED Accessories


Dimmer



RGB Controller




RGB Amplifier

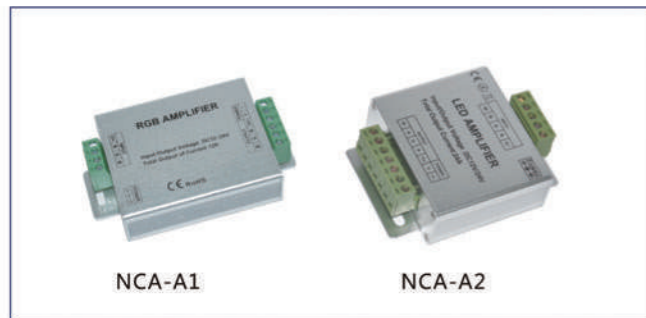


DMX Controller




Non-waterproof Driver

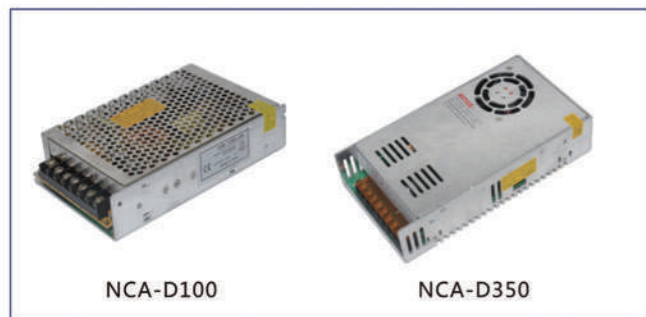

MEANWELL Driver

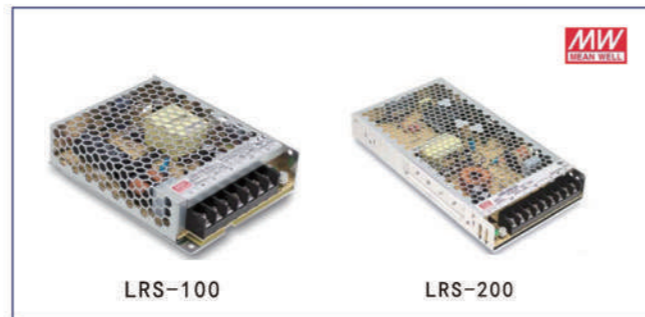

IP66 Waterproof Driver (CE/UL/SAA)

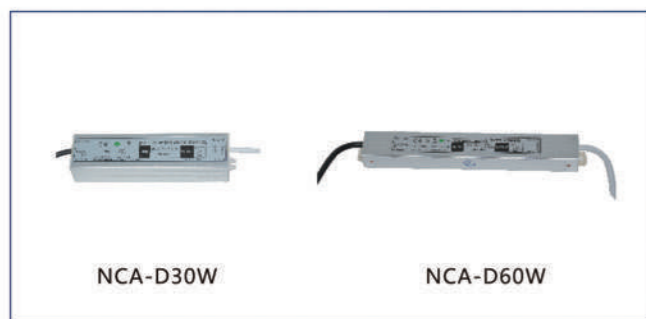

Application



Seaside Villa in Spain



LED Inground Light in Germany



Step Wall light in Cyprus



Square lighting in HK




HK Bus System



Grand Hyatt




Light Box in Italy

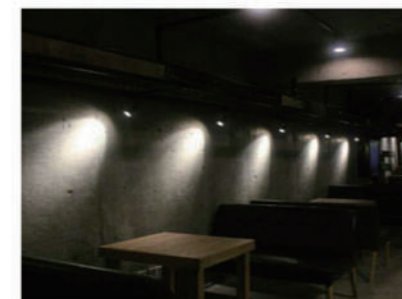

LED Spotlight



Mexico Villa Project

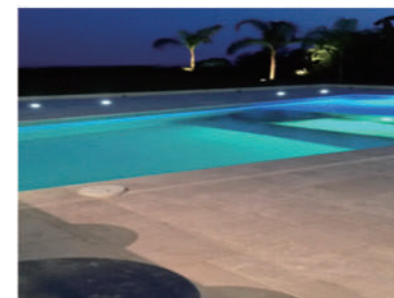

Seaside Villa in Panama



LED Strip in Russia



Step Light in Australia

Application



Fountain light in Spain



Downlight



Garden Spotlight in Mexico



Inground Project in Canada



Bars in USA




Lyon Festival of Lights




Fish Bar Project in UK



Inground Light in Indonesia

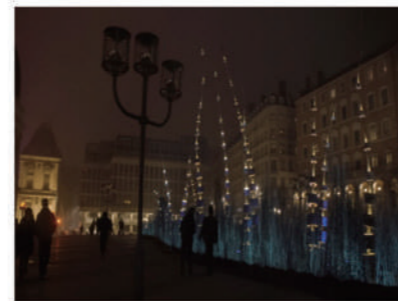

Lyon Festival of Lights France

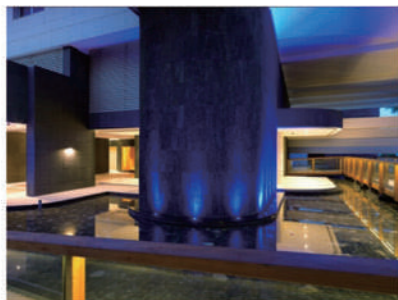

Villa project in Cyprus



Inground Light in Italy



Australian Federal Police Project

