



HOME ITEMS FF&E
**OUTDOOR
RESIDENTIAL
LIGHTING**



Solar Power Supply Lamp

C3090-B

Pramaters

1. Color Temperature: 3000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : stainless steel
12. IP Rating : IP54
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Solar
17. Emitting Color: Warm White



C3007-G

Parameters

1. Color Temperature: 3000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : stainless steel
12. IP Rating : IP54
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Solar
17. Emitting Color: Warm White



C3036-I

Parameters


1. Color Temperature: 3000K
2. Lamp Luminous Efficiency(lm/w): 50
3. Color rendering index(Ra): 80
4. Beam Angle(°): No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -25-65°C
11. Lamp Body Material : stainless steel
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: solar
17. Emitting Color: Warm White
18. package sizes : 31*31*28CM
19. products sizes : 15*25*30CM



C3075B

Parameters

1. Color Temperature: 3000K
2. Lamp Luminous Efficiency(lm/w): 50
3. Color rendering index(Ra): 80
4. Beam Angle(°): No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -25-65°C
11. Lamp Body Material :stainless steel
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: solar
17. Emitting Color: Warm White
18. package sizes : 31*31*28CM
19. products sizes : 15*25*30CM

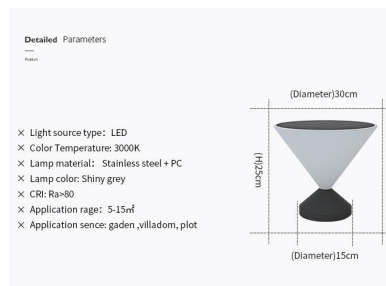

C3048

Parameters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : stainless steel
12. IP Rating : IP68
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Solar
Color: Warm White



B1104

Parameters

1. Color Temperature: 3000K
2. Lamp Luminous Efficiency(lm/w): 50
3. Color rendering index(Ra): 80
4. Beam Angle(°): No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperature : -30-50°C
11. Lamp Body Material : iron
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Solar
17. Emitting Color: Warm White



C3030

Pramaters

- 1.Color Temperature: 3000K
- 2.Lamp Luminous Efficiency(lm/w): 50
- 3.Color rendering index(Ra): 80
- 4.Beam Angle(°): No
- 5.Operation life(h) : 50000
- 6.Working time : 50000
- 7.Input Voltage (V : AC 220V(± 10%)
- 8.Luminous Flux: 80
- 9.Luminous angle: 360
- 10.Working Temperatur : -30-50°C
- 11.Lamp Body Material :acrylic
- 12.IP Rating : IP65
- 13.Product Certification: CE
- 14.Light Source :LED
- 15.Warranty(Year):2 years
- 16.Power Supply: solar
- 17.Emitting Color: Warm White



L6024

Parameters


1. Color Temperature: 3000K
2. Lamp Luminous Efficiency(lm/w): 50
3. Color rendering index(Ra): 80
4. Beam Angle(°) : No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : acrylic
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year):2 years
16. Power Supply: solar
17. Emitting Color: Warm White



C3075-C1

Parameters



1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur :-30-50°C
11. Lamp Body Material : stainless steel
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Electric/solar
17. Emitting Color: Warm White

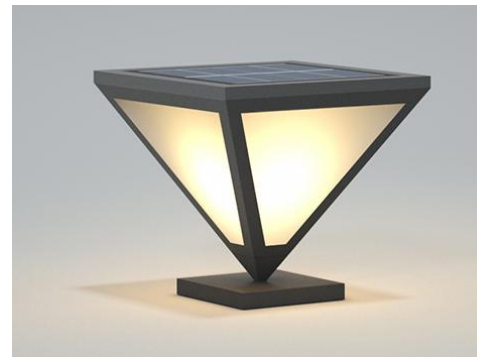

C3048F

Parameters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : metals
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year):2 years
16. Power Supply: Electric/Solar
17. Emitting Color: Warm White



C3046-M

Parameters


1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperature : -30-50°C
11. Lamp Body Material : metals
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year):2 years
16. Power Supply: Electric/Solar
17. Emitting Color: Warm White



C2023I

Parameters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperature : -30-50°C
11. Lamp Body Material : metals
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year):2 years
16. Power Supply: Electric/Solar
17. Emitting Color: Warm White

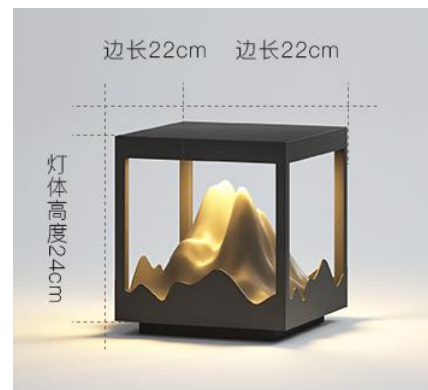

C23095-D

Parameters


1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperature : -30-50°C
11. Lamp Body Material : metals
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year):2 years
16. Power Supply: Electric/Solar
17. Emitting Color: Warm White



C3007-F

Parameters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : metals
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year):2 years
16. Power Supply: Electric/Solar
17. Emitting Color: Warm White

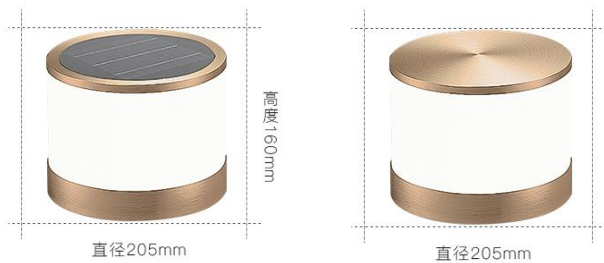

C3075-D

Pramaters

- 1.Color Temperature: 3000K-6000K
- 2.Lamp Luminous Efficiency(lm/w): 30/50
- 3.Color rendering index(Ra): 80
- 4.Beam Angle(°): Yes/No
- 5.Operation life(h) : 50000
- 6.Working time : 50000
- 7.Input Voltage (V : AC 220V(± 10%)
- 8.Luminous Flux: 80
- 9.Luminous angle: 360
- 10.Working Temperatur :-30-50°C
- 11.Lamp Body Material : stainless steel
- 12.IP Rating : IP54
- 13.Product Certification: CE
- 14.Light Source :LED
- 15.Warranty(Year): 2 years
- 16.Power Supply: solar
- 17.Emitting Color: Warm White



M2016B

Pramaters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur :-30-50°C
11. Lamp Body Material : aluminium
12. IP Rating : IP68
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Solar
17. Emitting Color: Warm White



B1001

Pramaters

1. Color Temperature: 3000K-6000K
 2. Lamp Luminous Efficiency(lm/w): 30/50
 3. Color rendering index(Ra): 80
 4. Beam Angle(°): Yes/No
 5. Operation life(h) : 50000
 6. Working time : 50000
 7. Input Voltage (V : AC 220V(± 10%)
 8. Luminous Flux: 80
 9. Luminous angle: 360
 10. Working Temperatur : -30-50°C
 11. Lamp Body Material : stainless steel
 12. IP Rating : IP68
 13. Product Certification: CE
 14. Light Source :LED
 15. Warranty(Year): 2 years
 16. Power Supply: Electric/Solar
- Color: Warm White



Solar Power Supply




Electric Power Supply

C3043

Pramaters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur :-30-50°C
11. Lamp Body Material : stainless steel
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: solar
17. Emitting Color: Warm White (can make 7colors)

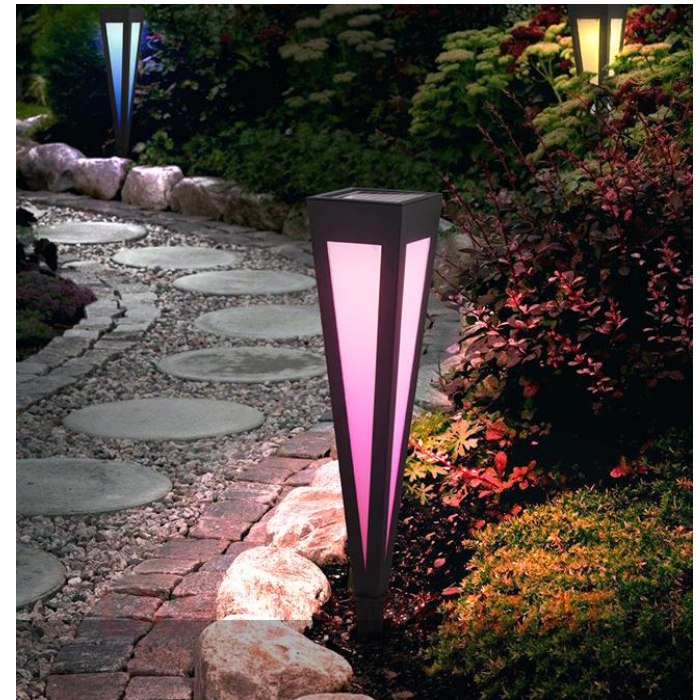

C3032-E

Parameters


1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : stainless steel
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Electric
17. Emitting Color: Warm White



C3032-B

Parameters

1. Color Temperature: 2750K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material :
12. IP Rating : IP54
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: solar
17. Emitting Color: Warm White



B-W1036-D

Pramaters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : stainless steel
12. IP Rating : IP54
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Solar
17. Emitting Color: Warm White




C3008F

Parameters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : stainless steel
12. IP Rating : IP54
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Solar
17. Emitting Color: Warm White





边长16cm 边长16cm

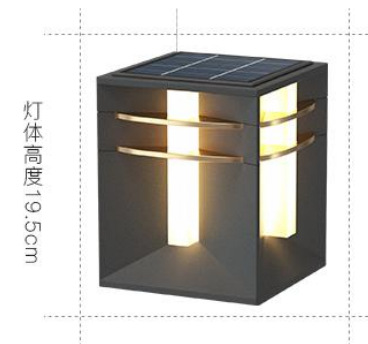

C3007

Parameters


1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : stainless steel
12. IP Rating : IP54
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Solar
17. Emitting Color: Warm White

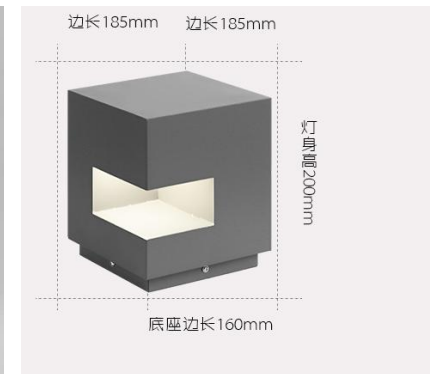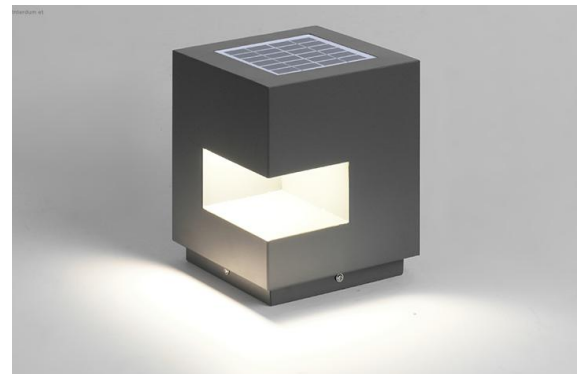

C3058

Parameters

1. Color Temperature: 2750K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material :
12. IP Rating : IP65/IP54
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: solar
17. Emitting Color: Warm White

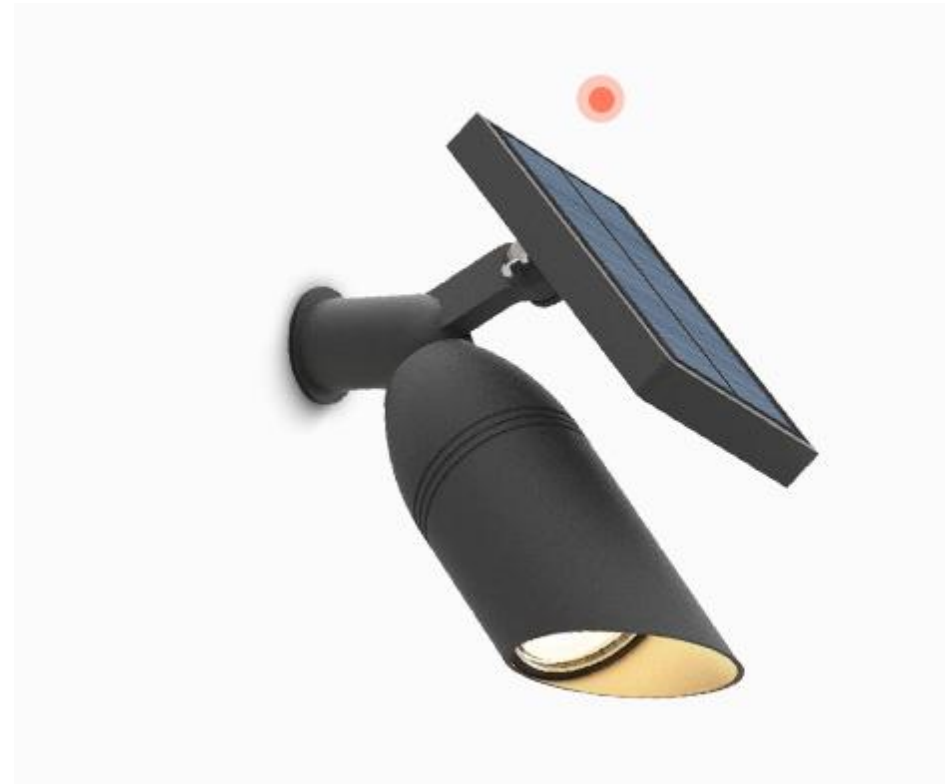

C3058H

Parameters

1. Color Temperature: 3000K
2. Lamp Luminous Efficiency(lm/w): 50
3. Color rendering index(Ra): 80
4. Beam Angle(°): No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperature :-30-50°C
11. Lamp Body Material :Aluminum
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: solar
17. Emitting Color: Warm White



Detailed Parameters

- × Light source type: T5
- × Color Temperature: 3000K
- × Lamp material: Aluminum Glass
- × Lamp color: Flash Gray
- × CRI: Ra>80
- × Application range: 5-10m²
- × Application scene: garden ,villadom ,plot



L-6037

Parameters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : aluminum
12. IP Rating : IP54
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: solar
17. Emitting Color: Warm White





Electric Power Supply Lamp

C3064-L

Parameters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur :-30-50°C
11. Lamp Body Material : Aluminum
12. IP Rating : IP54
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Electric
17. Emitting Color: Warm White



L-6037

Parameters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : iron art
12. IP Rating : IP54
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 12 years
16. Power Supply: Electric
17. Emitting Color: Warm White



C3057b

Pramaters

- 1.Color Temperature: 3000K
- 2.Lamp Luminous Efficiency(lm/w): 50
- 3.Color rendering index(Ra): 80
- 4.Beam Angle(°): No
- 5.Operation life(h) : 50000
- 6.Working time : 50000
- 7.Input Voltage (V : AC 220V(± 10%)
- 8.Luminous Flux: 80
- 9.Luminous angle: 360
- 10.Working Temperatur : -30-50°C
- 11.Lamp Body Material :Resin
- 12.IP Rating : IP65
- 13.Product Certification: CE
- 14.Light Source :LED
- 15.Warranty(Year): 2 years
- 16.Power Supply: Electric
- 17.Emitting Color: Warm White



B1120

Parameters

1. Color Temperature: 3000K
2. Lamp Luminous Efficiency(lm/w): 50
3. Color rendering index(Ra): 80
4. Beam Angle(°): No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur :-30-50°C
11. Lamp Body Material :stainless iron
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Electric
17. Emitting Color: Warm White



B1119

Parameters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°) : Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : iron
12. IP Rating : IP33
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Electric
17. Emitting Color: Warm White



B1120-B

Parameters


1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : aluminium
12. IP Rating : IP54
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Electric
17. Emitting Color: Warm White



B1141J

Parameters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperature : -30-50°C
11. Lamp Body Material :
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: solar/Electric
17. Emitting Color: Warm White

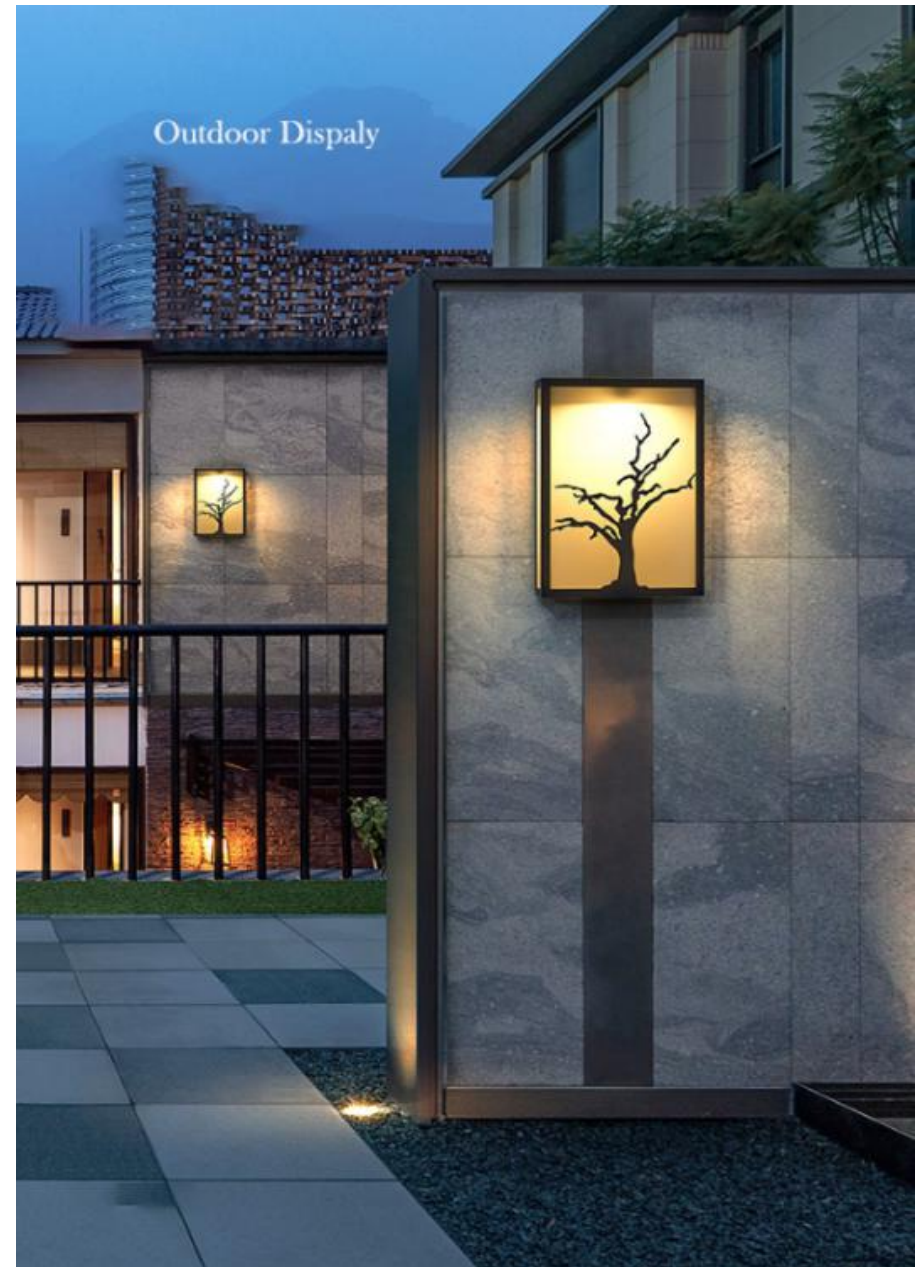

C3064-F

Parameters


1. Color Temperature: 3000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : resin
12. IP Rating : IP54
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Electric
17. Emitting Color: Warm White



B1120

Parameters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperature : -30-50°C
11. Lamp Body Material :
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: solar/Electric
17. Emitting Color: Warm White

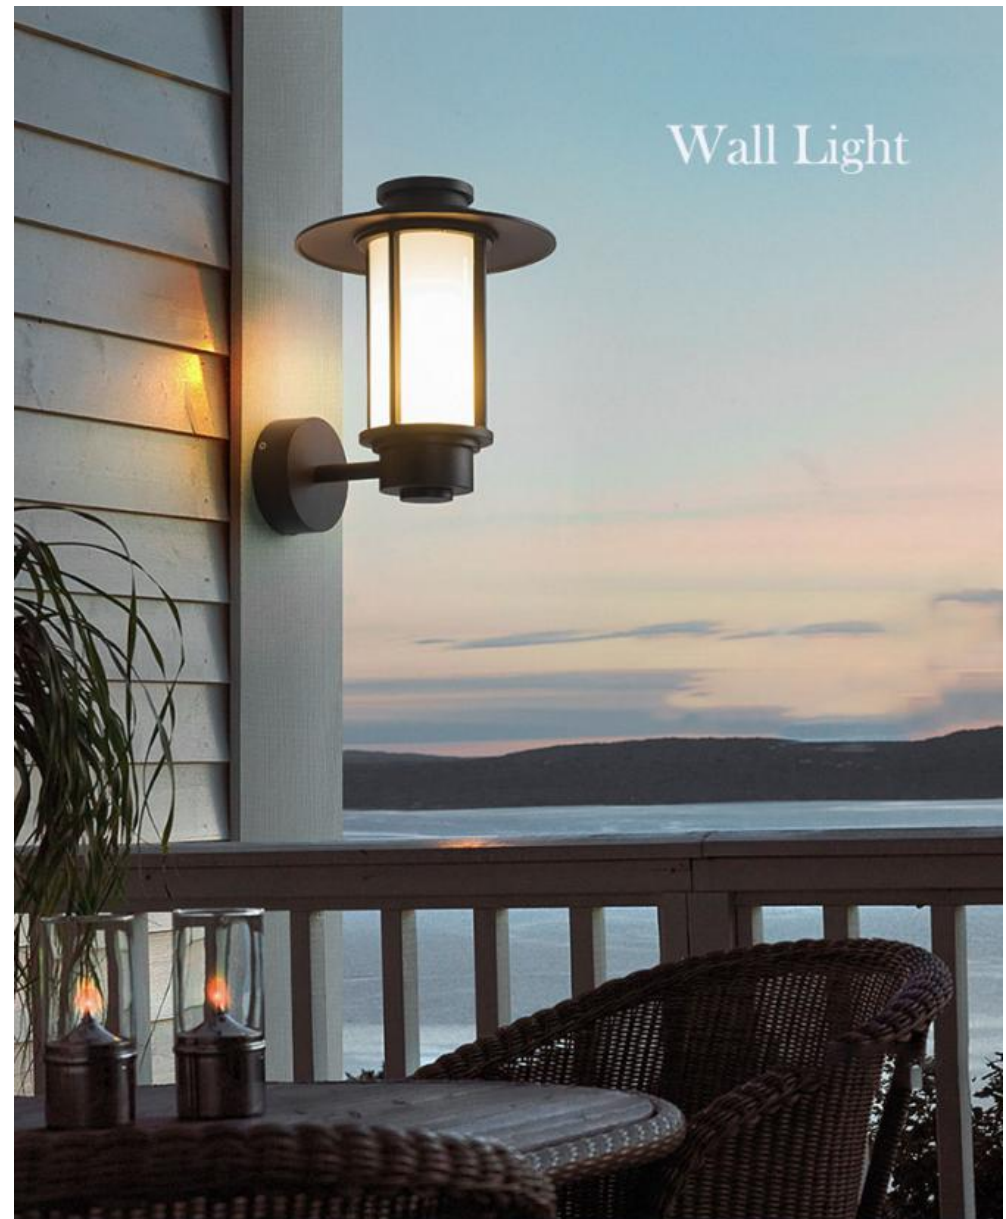

C3012

Parameters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur :-30-50°C
11. Lamp Body Material : Aluminum
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Electric
17. Emitting Color: Warm White



C-3060

Parameters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : Aluminum
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Electric
17. Emitting Color: Warm White



C3070-F

Parameters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : Aluminum
12. IP Rating : IP54
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Electric
17. Emitting Color: Warm White



C3048-K

Parameters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : stainless steel
12. IP Rating : IP54
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year)2 years
16. Power Supply: Electric
17. Emitting Color: Warm White



C3048B

Pramaters

- 1.Color Temperature: 3000K-6000K
- 2.Lamp Luminous Efficiency(lm/w): 30/50
- 3.Color rendering index(Ra): 80
- 4.Beam Angle(°): Yes/No
- 5.Operation life(h) : 50000
- 6.Working time : 50000
- 7.Input Voltage (V : AC 220V(± 10%)
- 8.Luminous Flux: 80
- 9.Luminous angle: 360
- 10.Working Temperatur :-30-50°C
- 11.Lamp Body Material : stainless steel
- 12.IP Rating : IP54
- 13.Product Certification: CE
- 14.Light Source :LED
- 15.Warranty(Year): 2 years
- 16.Power Supply: Electric
- 17.Emitting Color: Warm White



L-6037

Parameters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : aluminum
12. IP Rating : IP54
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Electric
17. Emitting Color: Warm White



C3067

Parameters



1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur :-30-50°C
11. Lamp Body Material : aluminium
12. IP Rating : IP54
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Electric
17. Emitting Color: Warm White



C3013

Parameters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : aluminium
12. IP Rating : IP54
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Electric
17. Emitting Color: Warm White

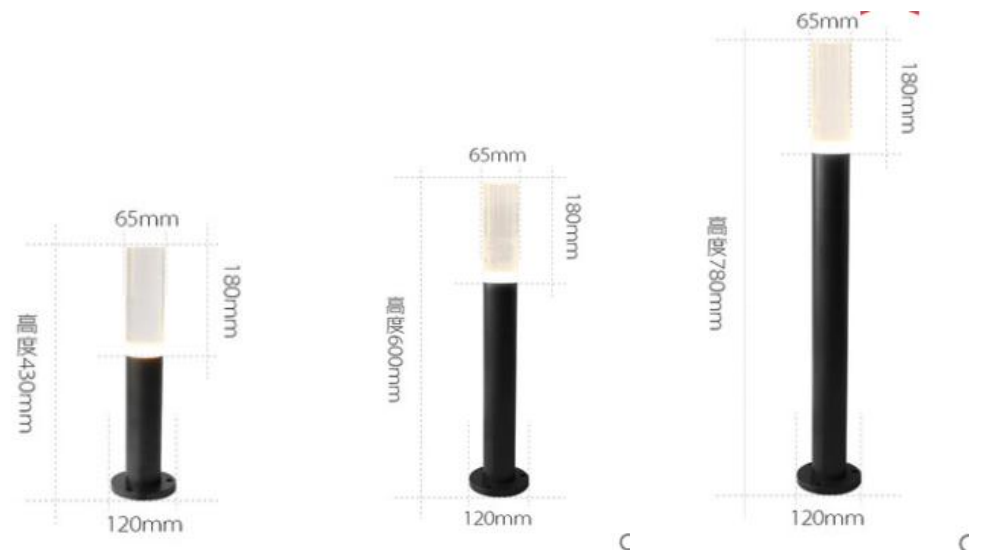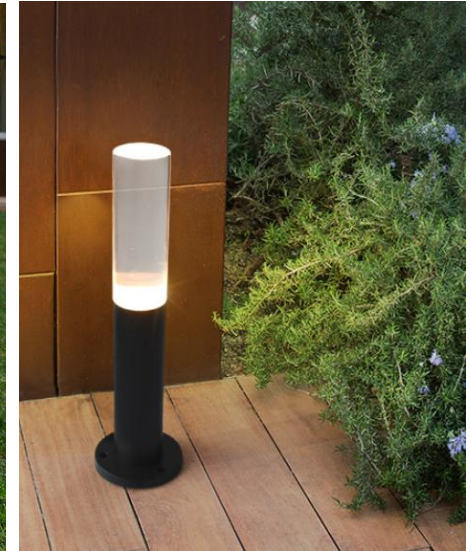

C3092

Parameters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur :-30-50°C
11. Lamp Body Material : aluminium
12. IP Rating : IP54
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply:
17. Emitting Color: Warm White



MD16

Parameters


1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur :-30-50°C
11. Lamp Body Material : aluminium
12. IP Rating : IP54
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Electric
17. Emitting Color: Warm White



M2020

Parameters


1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperature : -30-50°C
11. Lamp Body Material : aluminium
12. IP Rating : IP68
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Electric
17. Emitting Color: Warm White

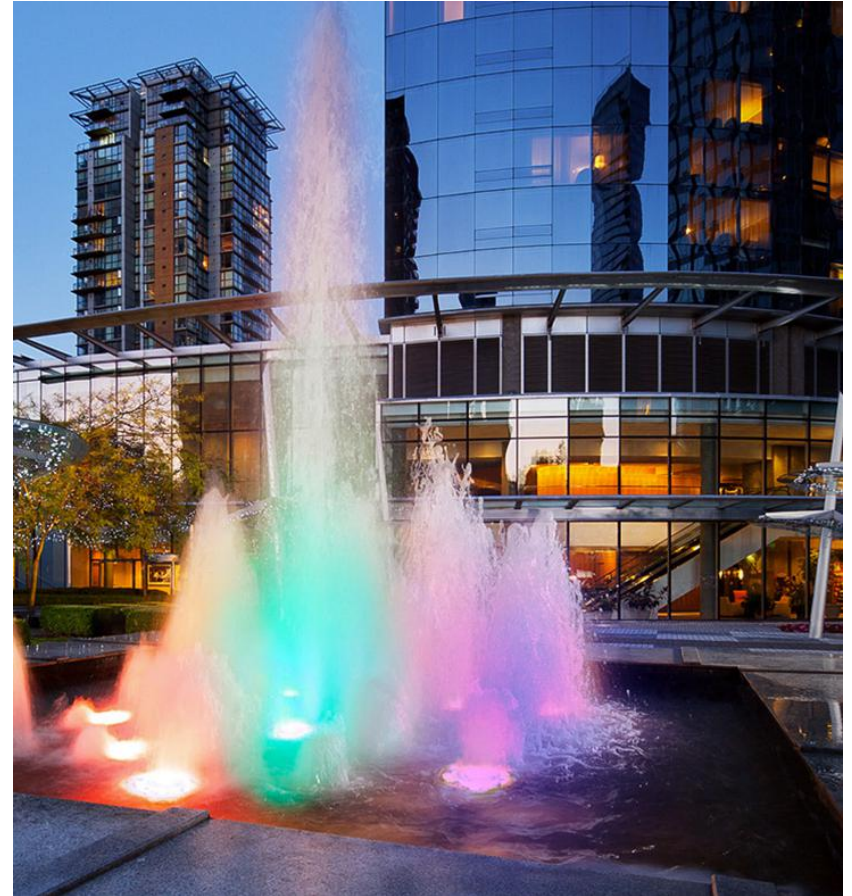

C3061

Parameters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : aluminium
12. IP Rating : IP68
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2years
16. Power Supply: Electric
17. Emitting Color: Warm White

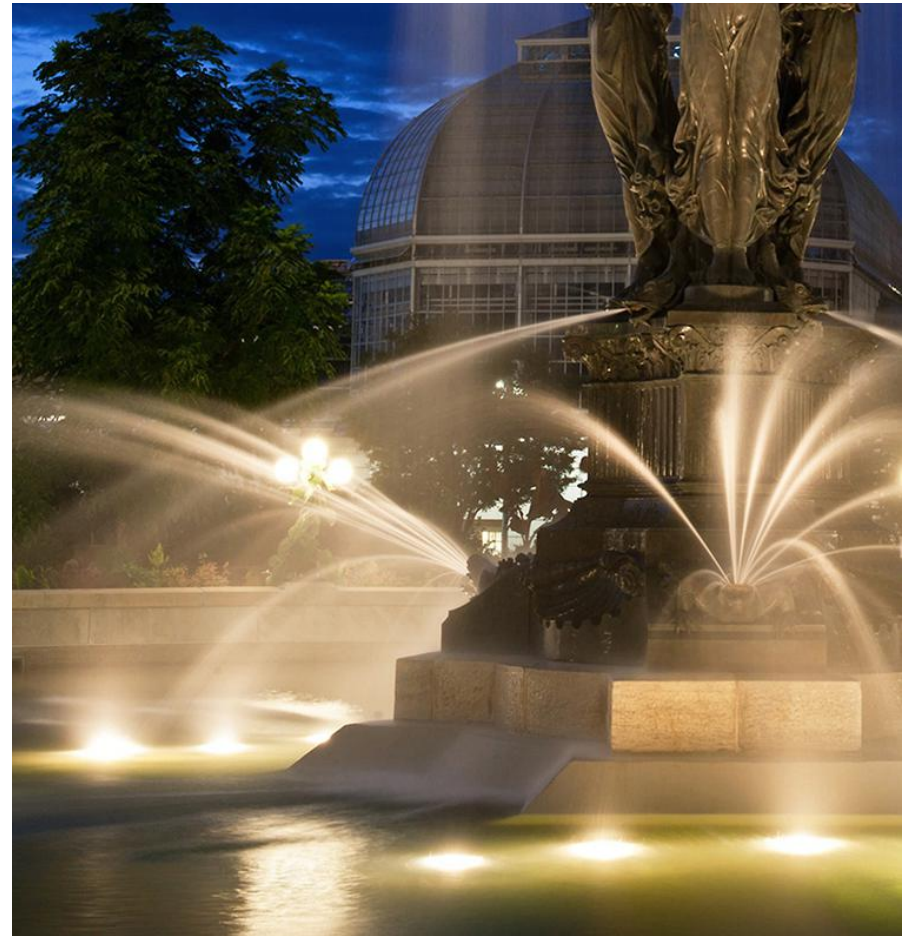

C3062

Parameters


1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperature : -30-50°C
11. Lamp Body Material : aluminium
12. IP Rating : IP68
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Electric
17. Emitting Color: Warm White



C3036-D

Parameters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : stainless steel
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2years
16. Power Supply: Electric
17. Emitting Color: Warm White

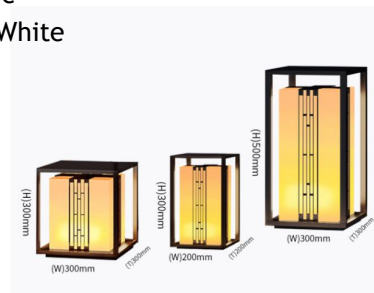

L6024

Parameters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : stainless steel
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year):2 years
16. Power Supply: Electric
17. Emitting Color: Warm White



Products detail

- × Light source type: LED
- × Color Temperature: 3000K
- × Lamp material: Glass+ Metals
- × CRI: Ra>80
- × Application range: 5-10 m²
- × Application sence: gaden ,villadom, plot



C3032-B

Pramaters

- 1.Color Temperature: 3000K-6000K
- 2.Lamp Luminous Efficiency(lm/w): 30/50
- 3.Color rendering index(Ra): 80
- 4.Beam Angle(°): Yes/No
- 5.Operation life(h) : 50000
- 6.Working time : 50000
- 7.Input Voltage (V : AC 220V(± 10%)
- 8.Luminous Flux: 80
- 9.Luminous angle: 360
- 10.Working Temperatur : -30-50°C
- 11.Lamp Body Material : stainless steel
- 12.IP Rating : IP65
- 13.Product Certification: CE
- 14.Light Source :LED
- 15.Warranty(Year): 2 years
- 16.Power Supply: Electric
- 17.Emitting Color: Warm White



C3043-C+D

Parameters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperature : -30-50°C
11. Lamp Body Material : acrylic
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Electric
17. Emitting Color: Warm White



C3008-C

Parameters


1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : aluminum
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Electric
17. Emitting Color: Warm White



C3032-B

Parameters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperature : -30-50°C
11. Lamp Body Material : stainless steel
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Electric
17. Emitting Color: Warm White

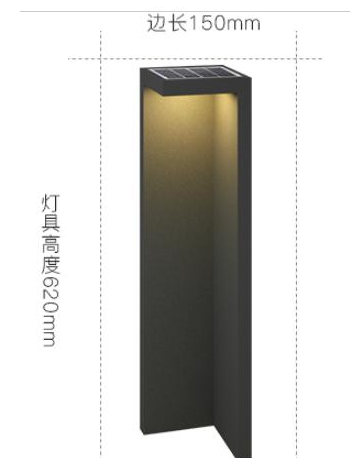

B1161-B

Parameters

1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur :-30-50°C
11. Lamp Body Material : aluminum
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Electric
17. Emitting Color: Warm White



B1184

Parameters


1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur :-30-50°C
11. Lamp Body Material : aluminum
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Electric
17. Emitting Color: Warm White



B1117-A

Pramaters


1. Color Temperature: 3000K-6000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur :-30-50°C
11. Lamp Body Material : aluminum
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Electric
17. Emitting Color: Warm White



B1191

Pramaters

- 1.Color Temperature: 3000K-6000K
- 2.Lamp Luminous Efficiency(lm/w): 30/50
- 3.Color rendering index(Ra): 80
- 4.Beam Angle(°): Yes/No
- 5.Operation life(h) : 50000
- 6.Working time : 50000
- 7.Input Voltage (V : AC 220V(± 10%)
- 8.Luminous Flux: 80
- 9.Luminous angle: 360
- 10.Working Temperatur :-30-50°C
- 11.Lamp Body Material : aluminum
- 12.IP Rating : IP65
- 13.Product Certification: CE
- 14.Light Source :LED
- 15.Warranty(Year): 2 years
- 16.Power Supply: Electric
- 17.Emitting Color: Warm White

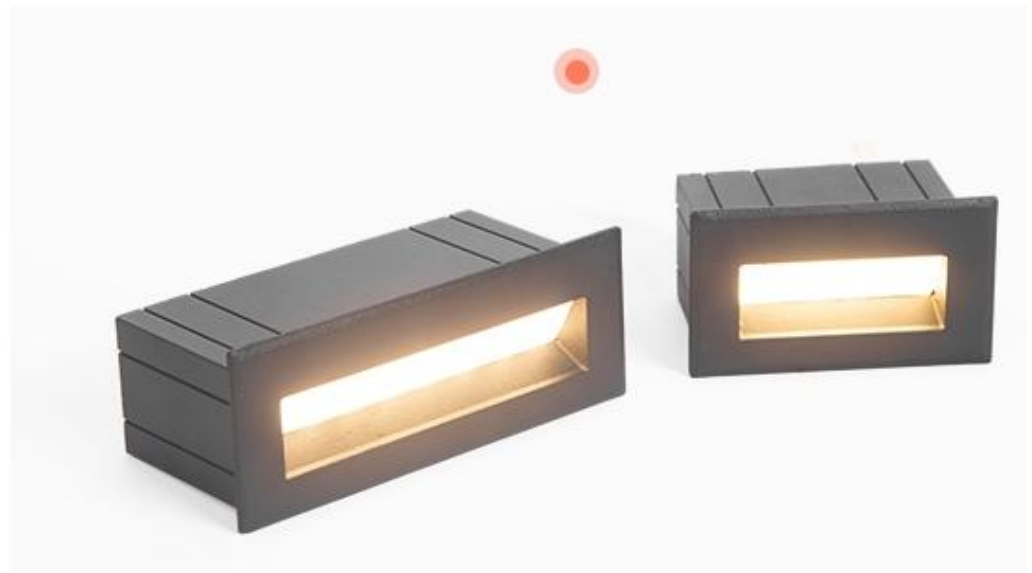

C3058

Parameters


1. Color Temperature: 3000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : aluminum
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: Electric
17. Emitting Color: Warm White



B1195-B

Pramaters


- 1.Color Temperature: 3000K
- 2.Lamp Luminous Efficiency(lm/w): 30/50
- 3.Color rendering index(Ra): 80
- 4.Beam Angle(°): Yes/No
- 5.Operation life(h) : 50000
- 6.Working time : 50000
- 7.Input Voltage (V : AC 220V(± 10%)
- 8.Luminous Flux: 80
- 9.Luminous angle: 360
- 10.Working Temperatur : -30-50°C
- 11.Lamp Body Material : aluminum
- 12.IP Rating : IP65
- 13.Product Certification: CE
- 14.Light Source :LED
- 15.Warranty(Year): 2 years
- 16.Power Supply: Electric
- 17.Emitting Color: Warm White



C3048J

Pramaters


- 1.Color Temperature: 3000K
- 2.Lamp Luminous Efficiency(lm/w): 30/50
- 3.Color rendering index(Ra): 80
- 4.Beam Angle(°): Yes/No
- 5.Operation life(h) : 50000
- 6.Working time : 50000
- 7.Input Voltage (V : AC 220V(± 10%)
- 8.Luminous Flux: 80
- 9.Luminous angle: 360
- 10.Working Temperatur : -30-50°C
- 11.Lamp Body Material : stainless steel
- 12.IP Rating : IP65
- 13.Product Certification: CE
- 14.Light Source :LED
- 15.Warranty(Year): 2 years
- 16.Power Supply: Electric
- 17.Emitting Color: Warm White

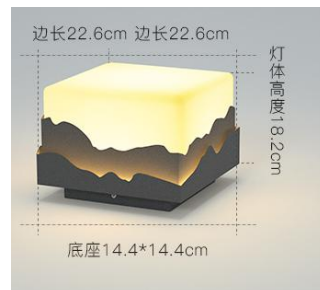

C3096-C

Pramaters



- 1.Color Temperature: 3000K
- 2.Lamp Luminous Efficiency(lm/w): 30/50
- 3.Color rendering index(Ra): 80
- 4.Beam Angle(°): Yes/No
- 5.Operation life(h) : 50000
- 6.Working time : 50000
- 7.Input Voltage (V : AC 220V(± 10%)
- 8.Luminous Flux: 80
- 9.Luminous angle: 360
- 10.Working Temperatur :-30-50°C
- 11.Lamp Body Material : stainless steel
- 12.IP Rating : IP65
- 13.Product Certification: CE
- 14.Light Source :LED
- 15.Warranty(Year): 2 years
- 16.Power Supply: Electric
- 17.Emitting Color: Warm White

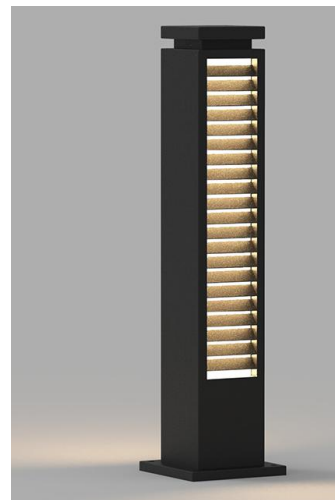

C3050-B SOLAR

Pramaters

- 1.Color Temperature: 3000K
- 2.Lamp Luminous Efficiency(lm/w): 30/50
- 3.Color rendering index(Ra): 80
- 4.Beam Angle(°): Yes/No
- 5.Operation life(h) : 50000
- 6.Working time : 50000
- 7.Input Voltage (V : AC 220V(± 10%)
- 8.Luminous Flux: 80
- 9.Luminous angle: 360
- 10.Working Temperatur :-30-50°C
- 11.Lamp Body Material : stainless steel
- 12.IP Rating : IP65
- 13.Product Certification: CE
- 14.Light Source :LED
- 15.Warranty(Year): 2 years
- 16.Power Supply: solar
- 17.Emitting Color: Warm White

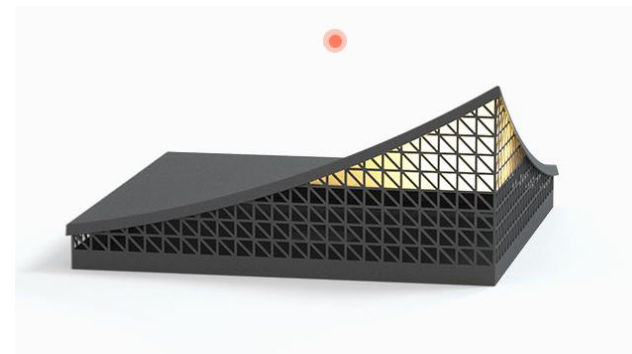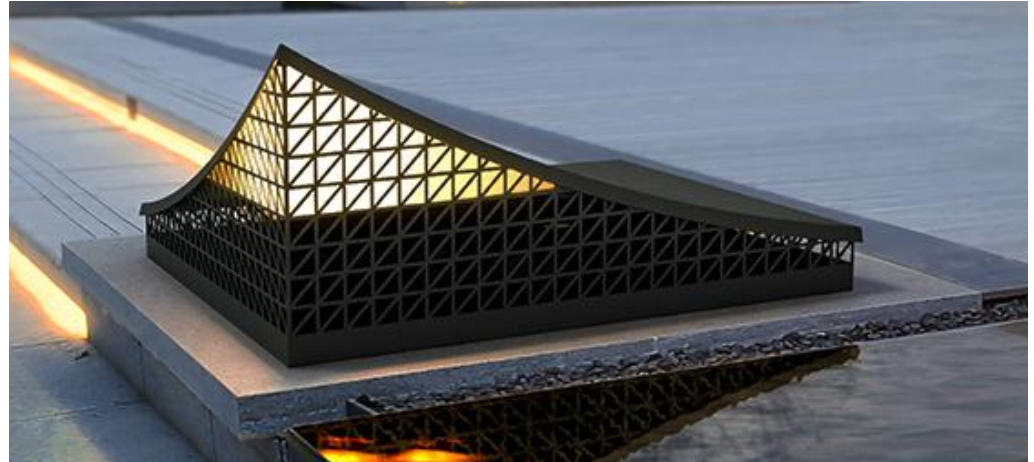

C3070-G+H

Parameters

1. Color Temperature: 3000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperature : -30-50°C
11. Lamp Body Material : stainless steel
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: solar
17. Emitting Color: Warm White



H款开灯展示



G款开灯展示

C3036-B

Pramaters

- 1.Color Temperature: 3000K
- 2.Lamp Luminous Efficiency(lm/w): 30/50
- 3.Color rendering index(Ra): 80
- 4.Beam Angle(°): Yes/No
- 5.Operation life(h) : 50000
- 6.Working time : 50000
- 7.Input Voltage (V : AC 220V(± 10%)
- 8.Luminous Flux: 80
- 9.Luminous angle: 360
- 10.Working Temperatur :-30-50°C
- 11.Lamp Body Material : stainless steel
- 12.IP Rating : IP65
- 13.Product Certification: CE
- 14.Light Source :LED
- 15.Warranty(Year): 2 years
- 16.Power Supply: solar
- 17.Emitting Color: Warm White



C3074-F electric/solar

Pramaters

- 1.Color Temperature: 3000K
- 2.Lamp Luminous Efficiency(lm/w): 30/50
- 3.Color rendering index(Ra): 80
- 4.Beam Angle(°): Yes/No
- 5.Operation life(h) : 50000
- 6.Working time : 50000
- 7.Input Voltage (V : AC 220V(± 10%)
- 8.Luminous Flux: 80
- 9.Luminous angle: 360
- 10.Working Temperatur :-30-50°C
- 11.Lamp Body Material : stainless steel
- 12.IP Rating : IP65
- 13.Product Certification: CE
- 14.Light Source :LED
- 15.Warranty(Year): 2 years
- 16.Power Supply: solar
- 17.Emitting Color: Warm White



B1156-C

Pramaters

- 1.Color Temperature: 3000K
- 2.Lamp Luminous Efficiency(lm/w): 30/50
- 3.Color rendering index(Ra): 80
- 4.Beam Angle(°): Yes/No
- 5.Operation life(h) : 50000
- 6.Working time : 50000
- 7.Input Voltage (V : AC 220V(± 10%)
- 8.Luminous Flux: 80
- 9.Luminous angle: 360
- 10.Working Temperatur :-30-50°C
- 11.Lamp Body Material : stainless steel
- 12.IP Rating : IP65
- 13.Product Certification: CE
- 14.Light Source :LED
- 15.Warranty(Year): 2 years
- 16.Power Supply: solar
- 17.Emitting Color: Warm White



C3021-G electric/solar

Parameters

1. Color Temperature: 3000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : stainless steel
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: solar
17. Emitting Color: Warm White



C3021-C electric/solar

Parameters

1. Color Temperature: 3000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperature :-30-50°C
11. Lamp Body Material : stainless steel
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: solar
17. Emitting Color: Warm White



C3021-E electric/solar

Parameters

1. Color Temperature: 3000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperature :-30-50°C
11. Lamp Body Material : stainless steel
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: solar
17. Emitting Color: Warm White



B1141-L

Parameters

1. Color Temperature: 3000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : stainless steel
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: solar
17. Emitting Color: Warm White



C3008-E

Parameters


1. Color Temperature: 3000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : stainless steel
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: solar
17. Emitting Color: Warm White



C3072D

Parameters

1. Color Temperature: 3000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : stainless steel
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: solar
17. Emitting Color: Warm White

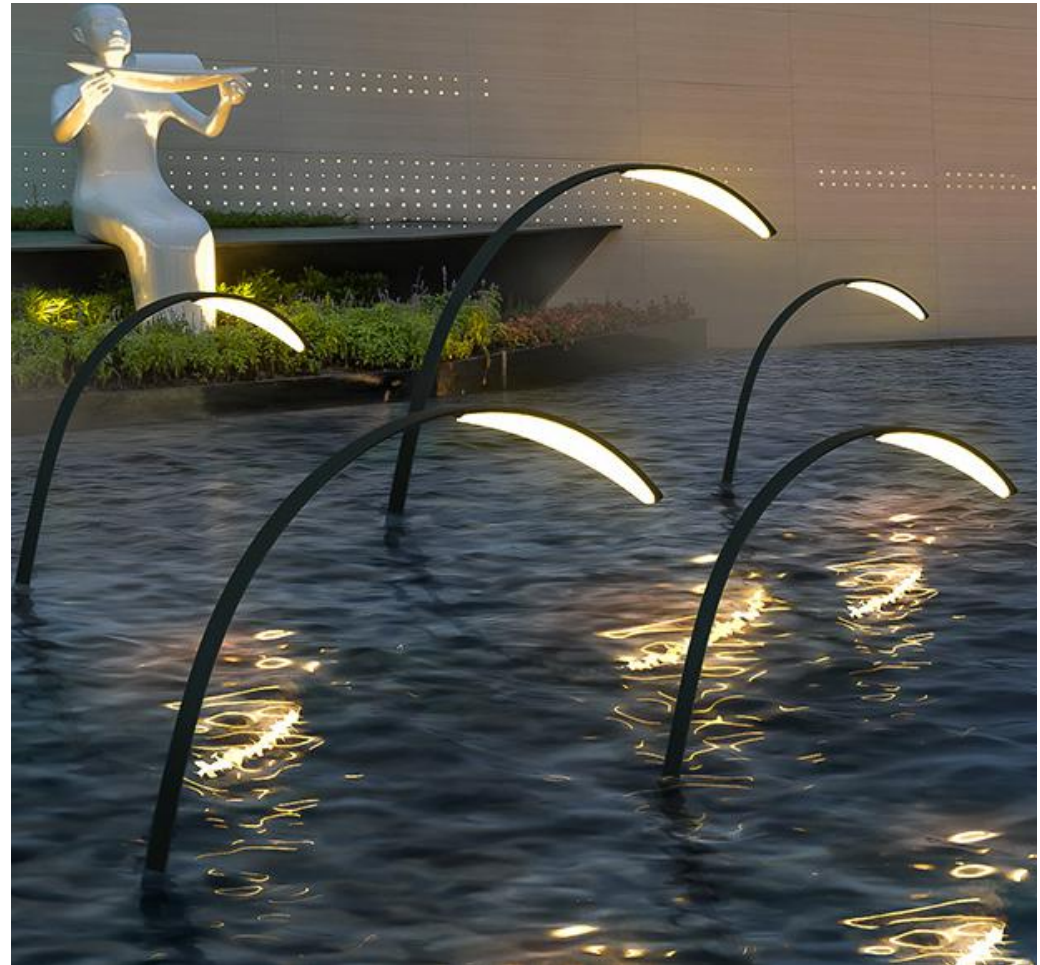

C3021-B electric/solar

Pramaters

- 1.Color Temperature: 3000K
- 2.Lamp Luminous Efficiency(lm/w): 30/50
- 3.Color rendering index(Ra): 80
- 4.Beam Angle(°): Yes/No
- 5.Operation life(h) : 50000
- 6.Working time : 50000
- 7.Input Voltage (V : AC 220V(± 10%)
- 8.Luminous Flux: 80
- 9.Luminous angle: 360
- 10.Working Temperatur :-30-50°C
- 11.Lamp Body Material : stainless steel
- 12.IP Rating : IP65
- 13.Product Certification: CE
- 14.Light Source :LED
- 15.Warranty(Year): 2 years
- 16.Power Supply: solar
- 17.Emitting Color: Warm White



C3022C

Parameters

1. Color Temperature: 3000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : stainless steel
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: electric
17. Emitting Color: Warm White



C3023-IS

Parameters

1. Color Temperature: 3000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : stainless steel
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: electric
17. Emitting Color: Warm White



C3094-D

Pramaters

- 1.Color Temperature: 3000K
- 2.Lamp Luminous Efficiency(lm/w): 30/50
- 3.Color rendering index(Ra): 80
- 4.Beam Angle(°): Yes/No
- 5.Operation life(h) : 50000
- 6.Working time : 50000
- 7.Input Voltage (V : AC 220V(± 10%)
- 8.Luminous Flux: 80
- 9.Luminous angle: 360
- 10.Working Temperatur :-30-50°C
- 11.Lamp Body Material : stainless steel
- 12.IP Rating : IP65
- 13.Product Certification: CE
- 14.Light Source :LED
- 15.Warranty(Year): 2 years
- 16.Power Supply: electric
- 17.Emitting Color: Warm White



C3015-J-40CM

Parameters

1. Color Temperature: 3000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : stainless steel
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: electric
17. Emitting Color: Warm White



B1179-E

Pramaters

- 1.Color Temperature: 3000K
- 2.Lamp Luminous Efficiency(lm/w): 30/50
- 3.Color rendering index(Ra): 80
- 4.Beam Angle(°): Yes/No
- 5.Operation life(h) : 50000
- 6.Working time : 50000
- 7.Input Voltage (V : AC 220V(± 10%)
- 8.Luminous Flux: 80
- 9.Luminous angle: 360
- 10.Working Temperatur : -30-50°C
- 11.Lamp Body Material : glass
- 12.IP Rating : IP65
- 13.Product Certification: CE
- 14.Light Source :LED
- 15.Warranty(Year): 2 years
- 16.Power Supply: electric
- 17.Emitting Color: Warm White



B-W1036-F

Pramaters

- 1.Color Temperature: 3000K
- 2.Lamp Luminous Efficiency(lm/w): 30/50
- 3.Color rendering index(Ra): 80
- 4.Beam Angle(°): Yes/No
- 5.Operation life(h) : 50000
- 6.Working time : 50000
- 7.Input Voltage (V : AC 220V(± 10%)
- 8.Luminous Flux: 80
- 9.Luminous angle: 360
- 10.Working Temperatur : -30-50°C
- 11.Lamp Body Material : stainless steel
- 12.IP Rating : IP65
- 13.Product Certification: CE
- 14.Light Source :LED
- 15.Warranty(Year): 2 years
- 16.Power Supply: electric
- 17.Emitting Color: Warm White



B1177C

Solar/Electric

Parameters

1. Color Temperature: 3000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperature : -30-50°C
11. Lamp Body Material : stainless steel
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: electric
17. Emitting Color: Warm White



C3023-I

Parameters

1. Color Temperature: 3000K
2. Lamp Luminous Efficiency(lm/w): 30/50
3. Color rendering index(Ra): 80
4. Beam Angle(°): Yes/No
5. Operation life(h) : 50000
6. Working time : 50000
7. Input Voltage (V : AC 220V(± 10%)
8. Luminous Flux: 80
9. Luminous angle: 360
10. Working Temperatur : -30-50°C
11. Lamp Body Material : stainless steel
12. IP Rating : IP65
13. Product Certification: CE
14. Light Source :LED
15. Warranty(Year): 2 years
16. Power Supply: electric
17. Emitting Color: Warm White

